

DDS238 single phase static watt hour meter (E1203)



The meter is designed to measure single phase two wire AC active energy. It adopt LSI and SMT technology, the key component are long life international brand product. All of its functions comply with the relative technical requirement for class 1 single phase watt hour meter in IEC62053-21. It is a long life meter with the advantage of high stability, high over load capability, low power loss and compact size.

Basic Function

- ★LCD display 6+1(default), 5+1, 5+2, 6+2
- ★Bi-directional total active energy measurement, reverse active energy measure in the total active energy
- ★Pulse LED indicates working of meter, Pulse output with optical coupling isolation
- ★Reverse LED indicates the reverse current direction or wire reverse connect
- ★Two type of cases(protective-class I and II) are available

Optional Function


- ★The meter can measure and LCD display the total forward/reverse active energy
- ★Battery for display when power off
- ★Supper capacity for display 48 hours when power off
- ★Ultrasonic weld sealing between meter cover and meter base, not used screw

DDS238 single phase static watt hour meter (E1203)

Technical Data

Rate voltage	110V,120V,220V,230,240V
Working voltage range	0.8~1.2Un
Rate Current	1.5(6)A, 10(40)A, 5(60)A, 10(100)A, or special required
Frequency	50Hz or 60Hz
Connection mode	CT type or Direct type
Display	LCD
Accuracy class	1.0
Power consumption	<1W/10VA
Start current	0.004Ib
AC voltage withstand	4000V/25mA for 60 sec
Impulse Voltage	6kV 1.2 μ s waveform
IP grade	IP51 or IP54
Constant	800~6400 imp/kWh
Pulse output	Passive pulse, pulse width is 80 \pm 5 ms
Executive standard	IEC61036, IEC62053-21, IEC62052-11
Work temperature	-30 $^{\circ}$ C~70 $^{\circ}$ C
Outline dimension LXMxH	145x105x50.5mm (short terminal cover L1) 175x105x50.5mm (Long terminal cover L2)
Weight	Approx 0.4kg

Wire connection

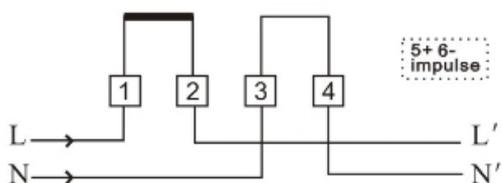

Outline dimension

